COMPACT

Konica Minolta's Ultra-Compact CR

The REGIUSΣ II is Konica Minolta's smallest and lightest CR. The desktop CR has a footprint of only 0.31 m² and weighs a mere 28 kg.



HIGH QUALITY

High Resolution

The REGIUS Σ ll supports pixel sizes of 87.5 μm and 175 μm for all cassette sizes, achieving a maximum resolution of 4020x4892 pixels (14"x17" at 87.5 μm).



Integral Processing

Environmentally friendly

processor.

Powerful

Integral Processing - the result of Konica Minolta's vast imaging experience is a robust algorithm that produces the optimum diagnostic image automatically. This patented technique greatly simplifies X-ray image acquisition while delivering incredibly consistent image quality and virtually eliminating retakes.


Energy consumption has been reduced to 100 VA- about the same as a

household light bulb. That's one tenth the power of the smallest film

The powerful REGIUS Σ II achieves a high throughput of 60 plates/hour

(maximum). It provides a smooth and stress-free workflow.

REGIUSΣI

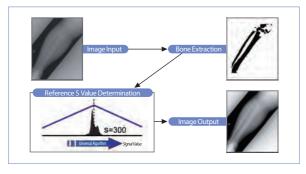

SMART CONSOLE

All-in-One!

The ImagePilot software combines CR image acquisition and PACS functionality. It is a complete workflow solution for clinics, imaging centers, and small hospitals. From one GUI, users can acquire, review, distribute and archive patient images.



Easy Control

ImagePilot supports a multi-touch display for the easiest operation. More than 100 functions and features are literally at the tips of your fingers.



ImagePilot


REGIUS SIGMA2 Specifications

Cassette size

- 14"×17" / 14"×14" / 11"×14" / 10"×12" / 8"×10" / 18×24 cm/24×30 cm/15×30 cm
- Sampling Pitch 2Types : 87.5 μm / 175 μm
- Maximum Resolution
- 4,020×4,892 (14"×17", 87.5 μm)
- Digital Gradation Level 4096 levels (12bit)
- Processing Capability Up to 60 plates / hour (14"×17" / 175 µm)
- Slots Insertion / ejection slot \times 1

- Power Supply Conditions
- - Readable Cassette
- Readable Plate

REGIUS SIGMA2 Outer Dimensions

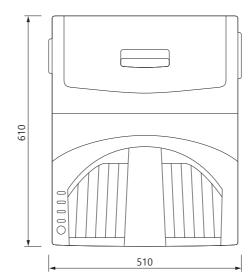

Brand Name	: REGIUS ΣII
Туре	: DIRECT DIGITIZER
Model	: REGIUS SIGMA 2







Outer Dimensions/Weight W 510×D610×H355 mm / Approximately 28 kg

100 VA max during operation: 20 VA when not in use.


Operating Conditions Temperature :10-30 °C

Humidity : 15-80 % RH (No Condensation)

REGIUS CASSETTE RC-300 14"×17", 14"×14", 11"×14", 10"×12", 8"×10", 24×30 cm, 18×24 cm, 15×30 cm



REGIUS PLATE FP-1S 14"×17", 14"×14", 11"×14", 10"×12", 8"×10", 24x30 cm, 18×24 cm, 15×30 cm

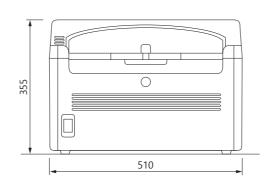

Unit : mm 1/10 scaled

* Specifications are subject to change without prior notice.

 Lowest Weight CR (approx. 28 kg) • Power consumption is less than one tenth of prior models. Smallest carbon footprint - CO2 emissions reduced by more than 64 % green products (Calulated at lifecycle, compared to our conventional CR)



REGIUS ZI




From patient registration to long term archive, Konica Minolta provides a complete workflow.

Konica Minolta has been a CR technology leader since 1996, consistently designing, developing, and delivering innovative solutions. The REGIUS Σ II represents the sum of this experience. REGIUS **SII** delivers a compact and affordable imaging solution that maintains the superior image quality and reliability expected from our REGIUS family of products.

Combined with the redesigned ImagePilot software, the REGIUS ΣII provides simple operation and smooth workflow to a wide range of medical practitioners.

RB

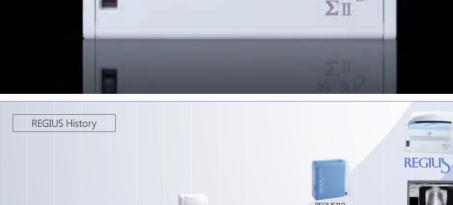

REGIUS



1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012·



Register

Manual or automated patient registration from anywhere in the office. Select the patient from the worklist or input patient information. No need to specify body part or exam type.

Patient data management

The ImagePilot server can manage more than 200,000 patients. With any registered patient, users can acquire new images or review prior exams

Seamless Link with EMR and RIS

Automatically receive patient information from any EMR or RIS that supports DICOM or HL7.



Useful Registration Use an existing PC* (i.e. at the reception area) for patient registration, if desired.

* Please confirm the specification for the client PC of ImagePilot







Just insert an exposed cassette into the REGIUS ΣII CR reader. The ImagePilot then automatically processes the image for optimized diagnostic viewing.



Images can be viewed at up to 20 ImagePilot client workstations throughout the office. Each client supports all the same ImagePilot functions - the same GUI at every workstation.

Archive

With storage capacities up to 2TB, ImagePilot can archive up to 300,000 images on its expandable servers. This can be expanded even further with add-on storage.

ImagePilot supports DICOM Store for sending patient images to a

remote PACS or for receiving images from other PACS systems or


*For available configurations, please contact your sales representative



Quick Preview The fully automated image processing produces consis-

tent, optimized images that display within 39 seconds.





Easy recovery Should a plate jam occur, it AWT can easily be removed by 1011 1011 opening the top cover or the backside cover.



Multifunctional Viewina

ImagePilot supports over 100 features and functions.

 Annotation Line/Arrow/Rectangle/Text/ Shutter/Marker, etc

- Scaling Cardio Index/Distance/
- Angle/Rectangular CT/ Pelvis Analysis, etc
- Image Tools
- Window Level / Zoom / Pan Magnifier/REGIUS Processing/
- Cropping, etc
- Report
- Other Modality Imag

Web Viewing

At your home or secondary practice location, you can view the images on your ImagePilot server via VPN.

AA



modalities. ImagePilot also supports DICOM query/retrieve for greater utility

DICOM Image Communication

NAS/DVD Backup

To secure the data stored on the ImagePllot server, you can create a backup on CD/DVD or NAS.

PDI Output

To easily share patient data with other clinics, hospitals or clients, ImagePllot can create a PDI CD/DVD which includes a DICOM viewer.



